


FITTINGS / Style 02 - 02D - 41


GROOVED-END FITTINGS

Maximum working pressure: 500 psi
For fire protection equipment and approved pressure ratings please contact Modgal.

STYLE 02 End-Cap

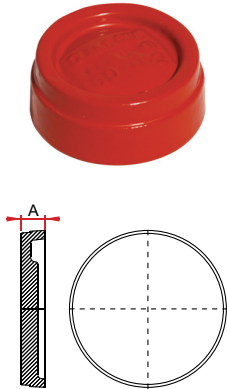

STYLE 02D End-Cap with Drain

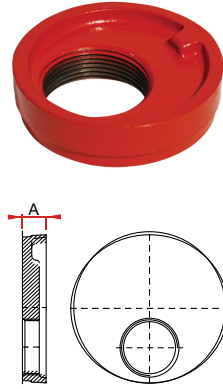

STYLE 41 Elbow 11¼°



Nominal Size (Inches / DN)	Pipe Outside Diameter	Dimension	Weight Lbs	Approvals
		A		
1¼" / 32	1.660	0.94	0.28	FM / UL LPCB / VDS
1½" / 40	1.900	0.98	0.35	FM / UL LPCB / VDS
2" / 50	2.375	0.94	0.47	FM / UL LPCB / VDS
2½" / 65	2.875	0.94	0.73	FM / UL LPCB
3" OD	3.000	0.98	0.79	FM / UL LPCB / VDS
3" / 80	3.500	0.98	1.10	FM / UL LPCB / VDS
4" / 100	4.500	1.10	1.68	FM / UL LPCB / VDS
5" OD	5.500	1.06	3.04	FM / UL LPCB / VDS
5" / 125	5.563	1.02	3.04	FM / UL LPCB
6" / 150	6.625	1.02	3.75	FM / UL LPCB / VDS
8" / 200	8.625	1.22	8.16	FM / UL LPCB / VDS
10" / 250	10.750	1.34	14.27	FM / UL VDS
12" / 300	12.750	1.34	20.29	UL
14" / 350	14.000	1.50	63.72	-
16" / 400	16.000	1.50	82.91	-

Nominal Size (Inches / DN)	Pipe Outside Diameter	Out- let	Dimension	Weight Lbs	Approvals
			A		
1¼" / 32	1.660	-	-	-	-
1½" / 40	1.900	-	-	-	-
2" / 50	2.375	1"	0.94	0.60	VDS
2½" / 65	2.875	1½"	0.96	0.88	FM
3" OD	3.000	1½" 2"	0.98	0.88	FM / UL VDS
3" / 80	3.500	1½" 2"	0.98	1.10	FM / UL VDS
4" / 100	4.500	1½" 2"	1.10	1.98	FM / UL VDS
5" OD	5.500	1½" 2"	1.02	2.98	FM / VDS
5" / 125	5.563	1½" 2"	1.02	2.98	FM
6" / 150	6.625	1½" 2"	1.02	4.28	FM / UL VDS
8" / 200	8.625	1½" 2"	1.22	8.45	FM / UL VDS
10" / 250	10.750	-	-	-	-
12" / 300	12.750	-	-	-	-

Nominal Size (Inches / DN)	Pipe Outside Diameter	Dimension	Weight Lbs	Approvals
		A		
1¼" / 32	1.660	1.38	0.57	FM
1½" / 40	1.900	1.38	0.68	FM
2" / 50	2.375	1.38	0.88	FM
2½" / 65	2.875	1.50	1.32	FM
3" OD	3.000	1.50	1.32	FM
3" / 80	3.500	1.50	2.01	FM
4" / 100	4.500	1.73	2.65	FM
5" OD	5.500	2.01	4.41	FM
5" / 125	5.563	2.01	4.41	FM
6" / 150	6.625	2.01	6.84	FM
8" / 200	8.625	2.01	9.26	FM

For use with higher than stated maximum working pressure, please contact Modgal Metal.